


## NETFILM 265 CLEAR

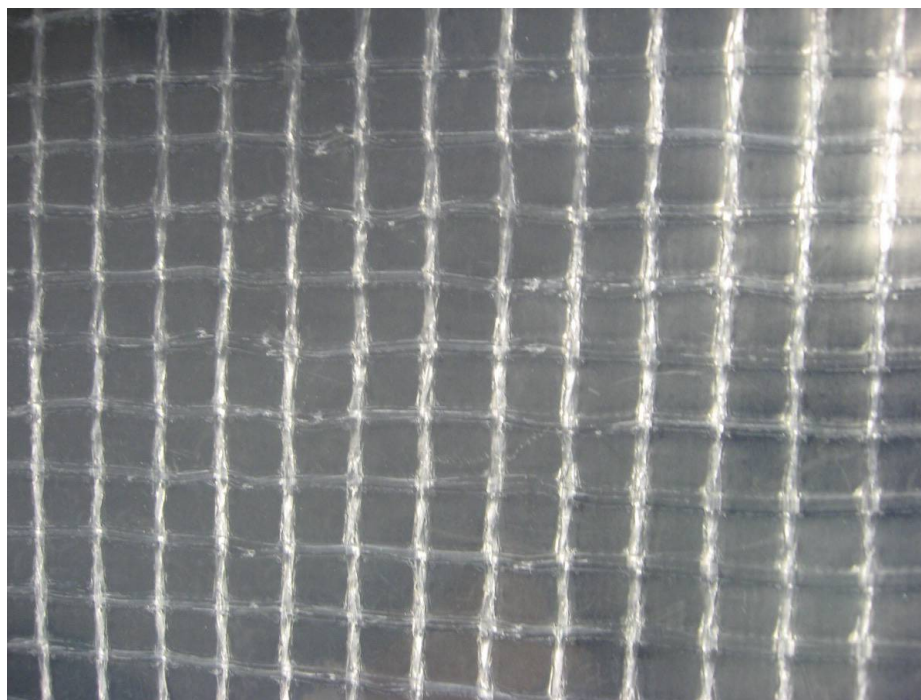

2FOW310TT	NETFILM 265 TRANSP. B= 3,10m
2FOW290TT	NETFILM 265 TRANSP. B= 2.91m
2FOW560TT	NETFILM 265 TRANSP. B= 2.56m
2FOW240TT	NETFILM 265 TRANSP. B= 2.40m

Standard roll length : 500 m1 \*

\*) might be marked some times in a jumbo roll, to indicate technical problem

Colour: clear natural

With extra fabric approx. 25cms on both longitudinal edges



**rovero**

Rovero Systems BV  
Krabbescheer 6  
P.O.box 162  
4940 AD Raamsdonksveer  
The Netherlands

Tel. +31 (0) 162 574 574  
Fax +31 (0) 162 574 500  
E-mail [info@rovero.nl](mailto:info@rovero.nl)  
[www.rovero.nl](http://www.rovero.nl)

# NETFILM 265 CLEAR

Technical product information						
Product name		Rovero				
Remarks						
Test name	Test method	Parameter	Spec		Value	Unit
Composition	ISO 2286-2	LDPE lamineerfolie			105	gr/m <sup>2</sup>
		HDPE fabric			47	gr/m <sup>2</sup>
		PE			43	gr/m <sup>2</sup>
		PE			70	gr/m <sup>2</sup>
		Total Weight			265	gr/m <sup>2</sup>
Test Certificate						
Test Name	Test method	Parameter	Spec		Value	Unit
Width	ISO 2286-1	Width	-5/+5	2910	2910	mm
Tensile strength	ISO 1421	Elongation CD	16-19	23,5	21,1	%
		Strength CD	340-565	470	441	N/50mm
		Elongation MD	16-19	19,7	20,3	%
		Strength MD	340-565	508	732	N/50mm
Tear Strength	ISO 6383-1	Tear Strength CD	95-105	65,3	77,6	N/50mm
		Tear Strength MD	95-105	58,8	65	N/50mm
Mass per unit area	ISO 2286-2	Mass per unit area	-2/+7	265	280	gr/m <sup>2</sup>
UV stabilized film					500	kLy
= with extra fabric on the edges						



**rovero**

Rovero Systems BV  
 Krabbescheer 6  
 P.O.box 162  
 4940 AD Raamsdonksveer  
 The Netherlands

Tel. +31 (0) 162 574 574  
 Fax +31 (0) 162 574 500  
 E-mail info@rovero.nl  
 www.rovero.nl